


EZ Plate[®] Instantaneous Water Heater

Double-wall, Brazen Plate Heat Exchanger

Dimensions

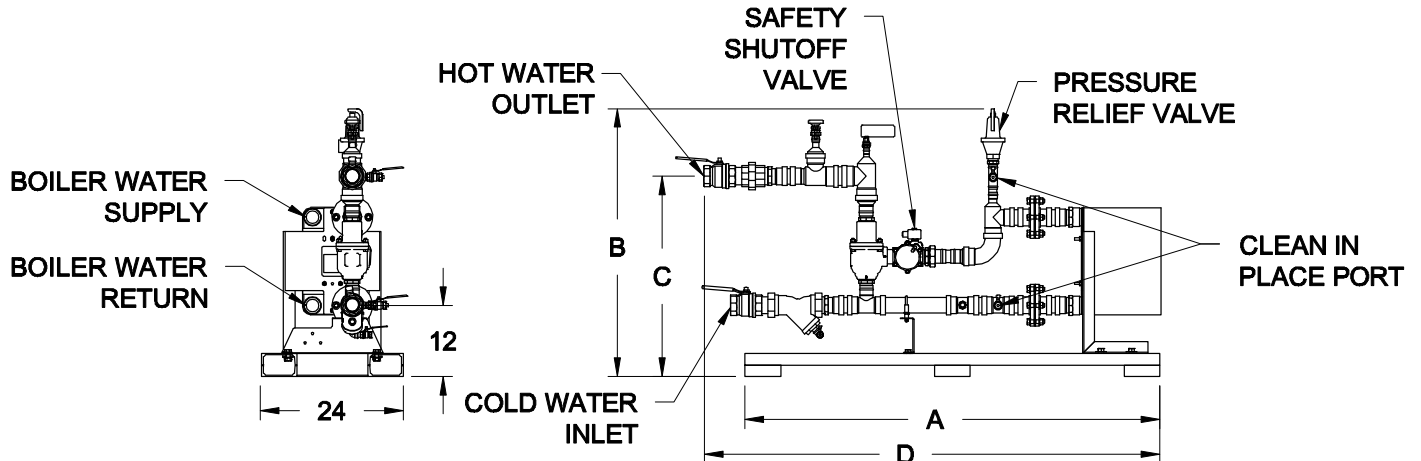

4 gpm minimum recirculation flow through EZ Plate required.
All dimensions are in inches.

Dimensions									
Model Number	Cold Inlet NPT	Hot Outlet NPT	Boiler Supply NPT	Boiler Return NPT	A	B	C	D	Weight (lbs)
EZ10DW	1	1	2-1/2	2-1/2	42	38-1/2	27-1/2	-	220
EZ15DW	1	1	2-1/2	2-1/2	42	38-1/2	27-1/2	-	230
EZ20DW	1-1/2	1-1/2	2-1/2	2-1/2	60	41	28-1/2	-	320
EZ30DW	1-1/2	1-1/2	2-1/2	2-1/2	60	41	28-1/2	-	330
EZ40DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	405
EZ50DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	415
EZ60DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	425
EZ75DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	480
EZ90DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	500
EZ105DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	530

Electrical requirements: 120V, 60 Hz., 15 amps service to a single-point connection
* For product configuration, refer to performance documents PV8466 through PV8475
For standard and optional equipment list, refer to form PV8487

