

TRICON® Condensing Water Heater
AQUAPLEX® STORAGE TANK (UNLINED DUPLEX ALLOY)
TANK SERIES 250 Gallon ■ 1500 to 2000 MBH


| MODEL | BTU INPUT | GPH RECOVERY - Thermal Efficiency | | SHIPPING WEIGHT (LBS.) | OPERATING WEIGHT (LBS.) |
|-----------------|-----------|-----------------------------------|-------------------|------------------------|-------------------------|
| | | 70° to 140°F ① | 40° to 140°F ② | | |
| 150 L 250A-PVIF | 1,500,000 | 2238 (87%) | 1603 (89%) | 1835 | 3095 |
| 180 L 250A-PVIF | 1,800,000 | 2685 (87%) | 1923 (89%) | 1835 | 3095 |
| 200 L 250A-PVIF | 2,000,000 | 2984 (87%) | 2137 (89%) | 1835 | 3095 |

① Recoveries and thermal efficiency derived from DOE 10 CFR 431 testing requirements (ANSI Z21.10.3 @ 70°F to 140°F).

② Recoveries and thermal efficiency based upon 40°F entering water temperature at full fire.

Dimensions are in inches unless otherwise specified.

For standard and optional equipment, see form PV 8008.

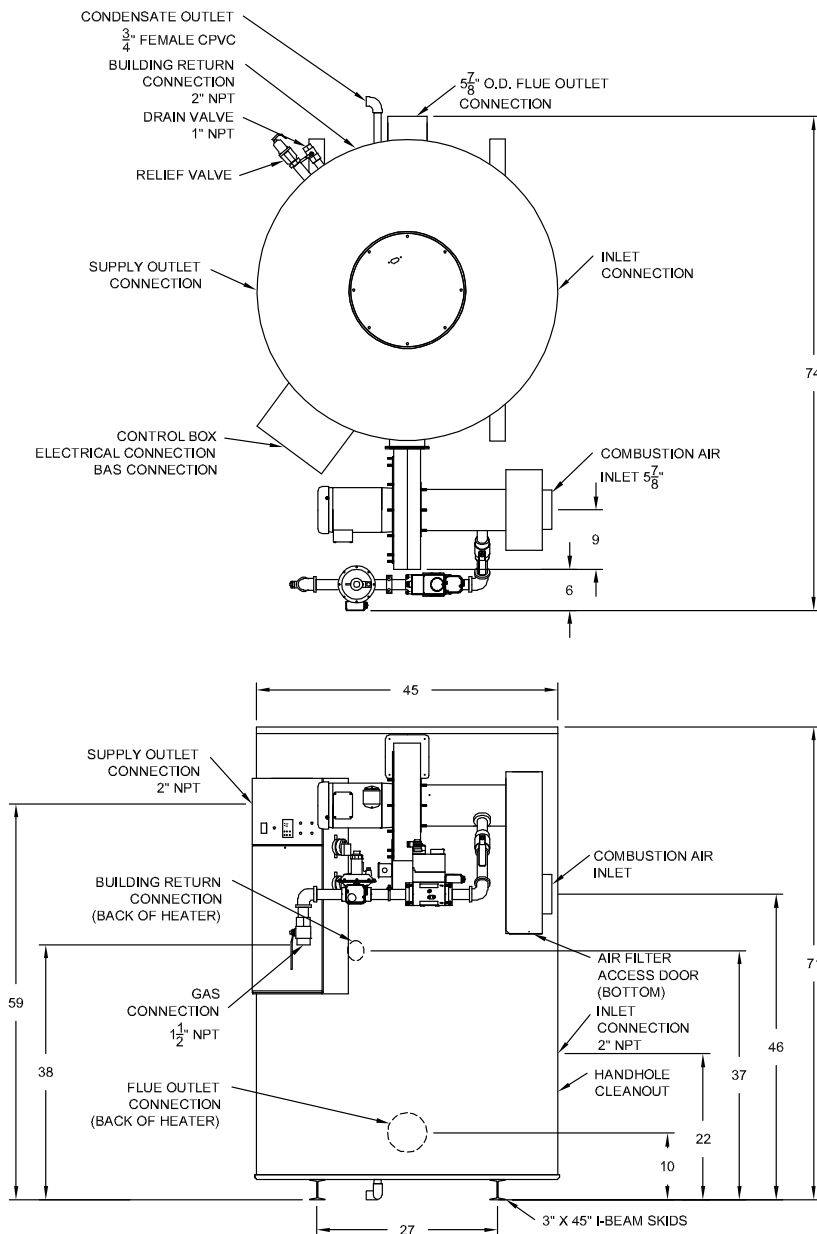

Standard Electrical

120V, 1Ø, 60 Hz., 15 amp circuit

Venting

Use an ETL, UL, ULC or CSA listed single or double wall 6" stainless steel Category IV vent, minimum distance 5 ft., maximum distance 100 eq. ft. Longer vents, ETL listed w/larger diameters, see I&M.

Inlet Combustion Air

Up to 100 eq. ft. using 6" PVC or galvanized vent pipe. Longer lengths, ETL listed with larger diameters, see I&M.

Gas Pressure - Natural

Minimum inlet flow pressure: 4.5" W.C.
 Maximum static pressure: 14" W.C.
 For < 4.5" W.C., consult factory.
 For LP option, consult factory.

Minimum Service Clearances

18" from sides,
 24" from front and top

Emissions

< 20 ppm NOx

