


# DURAWATT® ELECTRIC • PACKAGED WATER HEATER

## AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

### TANK SERIES 200 GALLONS

MODEL NUMBER	RECOVERY RATE GPH		INPUT KW	ELEMENT AMPS				SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F		240V, 1Ø	208V, 3Ø	240V, 3Ø	480V, 3Ø	
45 L 200A-VE	45	37	9 *	~	25	22	11	1160
90 L 200A-VE	90	70	18	75	50	44	22	1160
140 L 200A-VE	140	111	27	113	75	65	33	1160
180 L 200A-VE	180	150	36	150	100	87	44	1160
230 L 200A-VE	230	184	45	188	125	109	55	1170
270 L 200A-VE	270	220	54	225	150	130	65	1170
320 L 200A-VE	320	256	63	263	175	152	76	1170
370 L 200A-VE	370	300	72	300	200	174	87	1170
410 L 200A-VE	410	330	81	338	225	195	98	1180
460 L 200A-VE	460	370	90	375	250	217	109	1180
510 L 200A-VE	510	400	99	413	275	239	120	1200
550 L 200A-VE	550	440	108	450	300	260	130	1200
650 L 200A-VE	650	515	126	Consult factory	304	152	1210	
740 L 200A-VE	740	590	144		347	174	1230	
830 L 200A-VE	830	664	162		390	195	1240	
920 L 200A-VE	920	737	180		433	217	1250	
1010 L 200A-VE	1010	811	198		476	238	1260	
1100 L 200A-VE	1100	885	216		520	260	1270	
1200 L 200A-VE	1200	958	235		563	281	1280	

ASHRAE 90.1 compliant.  
 For standard and optional equipment, see form # PV 8130.  
 Dimensions in inches, unless otherwise noted.  
 Contact PVI representative for higher inputs.  
 \* 3-phase only.

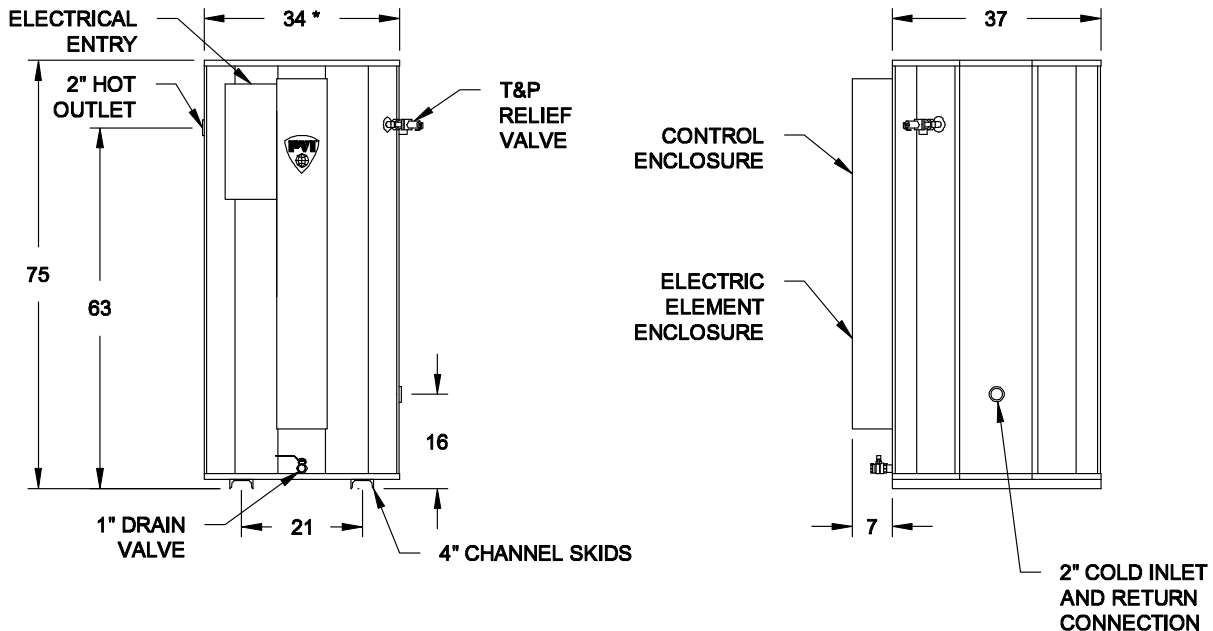

#### STANDARD ELECTRICAL REQUIREMENTS:

CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.  
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.  
**ALTERNATE VOLTAGES:** FOR 230/460V, MULTIPLY KW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.  
 FOR 220/440V, MULTIPLY KW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.