

DURAWATT® ELECTRIC • PACKAGED WATER HEATER

AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 200 GALLONS

MODEL NUMBER	RECOVERY RATE GPH		INPUT KW	ELEMENT AMPS				SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F		240V, 1Ø	208V, 3Ø	240V, 3Ø	480V, 3Ø	
45 L 200A-VE	45	37	9 **	~	25	22	11	1160
90 L 200A-VE	90	70	18	75	50	44	22	1160
140 L 200A-VE	140	111	27	113	75	65	33	1160
180 L 200A-VE	180	150	36	150	100	87	44	1160
230 L 200A-VE	230	184	45	188	125	109	55	1170
270 L 200A-VE	270	220	54	225	150	130	65	1170
320 L 200A-VE	320	256	63	263	175	152	76	1170
370 L 200A-VE	370	300	72	300	200	174	87	1170
410 L 200A-VE	410	330	81	338	225	195	98	1180
460 L 200A-VE	460	370	90	375	250	217	109	1180
510 L 200A-VE	510	400	99	413	275	239	120	1200
550 L 200A-VE	550	440	108	450	300	260	130	1200
650 L 200A-VE	650	515	126	Consult factory		304	152	1210
740 L 200A-VE	740	590	144			347	174	1230
830 L 200A-VE	830	664	162			390	195	1240
920 L 200A-VE	920	737	180			433	217	1250
1010 L 200A-VE	1010	811	198			476	238	1260
1100 L 200A-VE	1100	885	216			520	260	1270
1200 L 200A-VE	1200	958	235			563	281	1280

ASHRAE 90.1 compliant.


For standard and optional equipment, see form # PV 8130.

Dimensions in inches, unless otherwise noted.

Contact PVI representative for higher inputs.

* Optional proportional sequencer (PRSEQ) adds 4 inches to the left side of the heater.

** 3-phase only.

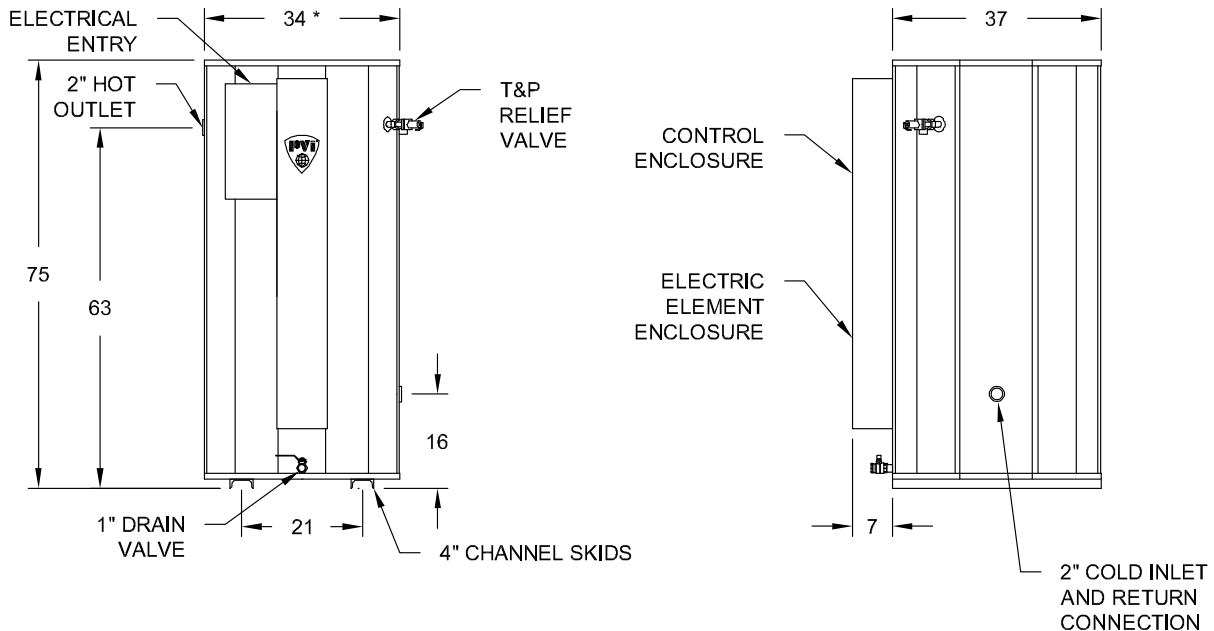

STANDARD ELECTRICAL REQUIREMENTS:

CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.
ALTERNATE VOLTAGES: FOR 230/460V, MULTIPLY KW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.
 FOR 220/440V, MULTIPLY KW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.

