


DURAWATT® ELECTRIC • PACKAGED WATER HEATER

AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 600 GALLONS

MODEL NUMBER	RECOVERY RATE GPH		INPUT KW	ELEMENT AMPS				SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F		240V, 1Ø	208V, 3Ø	240V, 3Ø	480V, 3Ø	
45 L 600A-VE	45	37	9 **	~	25	22	11	1870
90 L 600A-VE	90	70	18	75	50	44	22	1870
140 L 600A-VE	140	111	27	113	75	65	33	1870
180 L 600A-VE	180	150	36	150	100	87	44	1870
230 L 600A-VE	230	184	45	188	125	109	55	1880
270 L 600A-VE	270	220	54	225	150	130	65	1880
320 L 600A-VE	320	256	63	263	175	152	76	1880
370 L 600A-VE	370	300	72	300	200	174	87	1880
410 L 600A-VE	410	330	81	338	225	195	98	1890
460 L 600A-VE	460	370	90	375	250	217	109	1890
510 L 600A-VE	510	400	99	413	275	239	120	1910
550 L 600A-VE	550	440	108	450	300	260	130	1910
650 L 600A-VE	650	515	126	Consult factory	304	152	1920	
740 L 600A-VE	740	590	144		347	174	1940	
830 L 600A-VE	830	664	162		390	195	1950	
920 L 600A-VE	920	737	180		433	217	1960	
1010 L 600A-VE	1010	811	198		476	238	1970	
1100 L 600A-VE	1100	885	216		520	260	1980	
1200 L 600A-VE	1200	958	235		563	281	1990	

ASHRAE 90.1 compliant.
 For standard and optional equipment, see form #PV 8130.
 Dimensions in inches, unless otherwise noted.
 Contact PVI representative for higher inputs.
 ** 3-phase only.

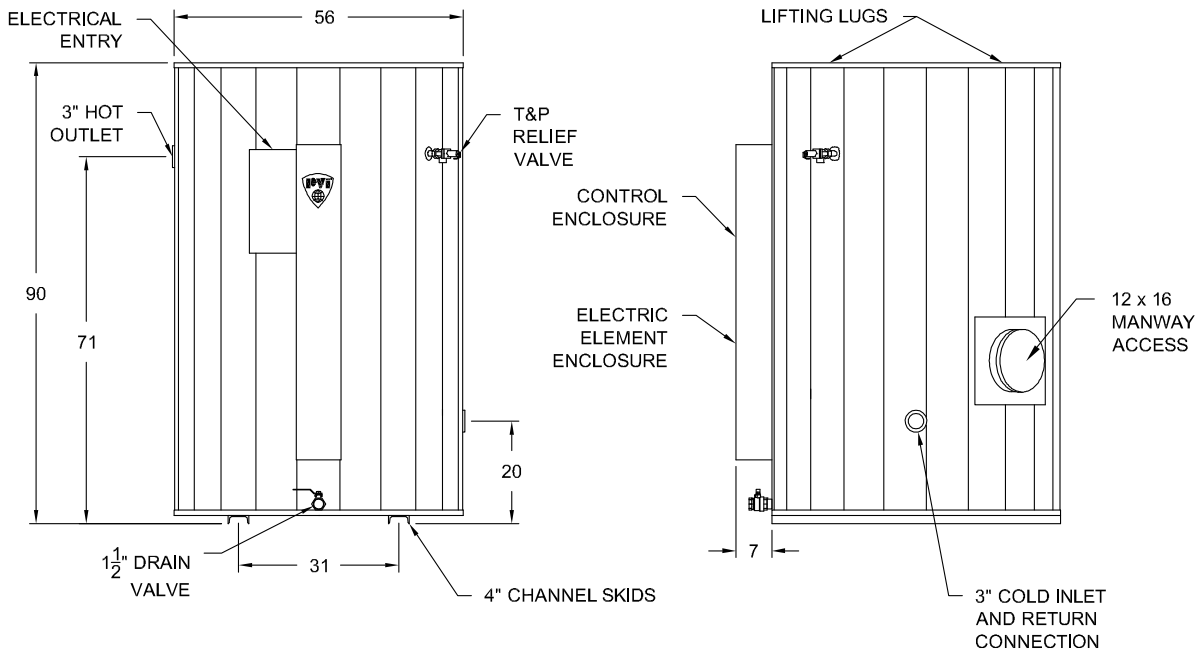

STANDARD ELECTRICAL REQUIREMENTS:
 CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.
ALTERNATE VOLTAGES: FOR 230/460V, MULTIPLY KW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.
 FOR 220/440V, MULTIPLY KW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.

