


DURAWATT® ELECTRIC • PACKAGED WATER HEATER

AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 750 GALLONS

MODEL NUMBER	RECOVERY RATE GPH		INPUT KW	ELEMENT AMPS				SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F		240V, 1Ø	208V, 3Ø	240V, 3Ø	480V, 3Ø	
45 L 750A-VE	45	37	9 **	~	25	22	11	2010
90 L 750A-VE	90	70	18	75	50	44	22	2010
140 L 750A-VE	140	111	27	113	75	65	33	2010
180 L 750A-VE	180	150	36	150	100	87	44	2010
230 L 750A-VE	230	184	45	188	125	109	55	2020
270 L 750A-VE	270	220	54	225	150	130	65	2020
320 L 750A-VE	320	256	63	263	175	152	76	2020
370 L 750A-VE	370	300	72	300	200	174	87	2020
410 L 750A-VE	410	330	81	338	225	195	98	2030
460 L 750A-VE	460	370	90	375	250	217	109	2030
510 L 750A-VE	510	400	99	413	275	239	120	2030
550 L 750A-VE	550	440	108	450	300	260	130	2050
650 L 750A-VE	650	515	126	Consult factory	304	152	2060	
740 L 750A-VE	740	590	144		347	174	2080	
830 L 750A-VE	830	664	162		390	195	2090	
920 L 750A-VE	920	737	180		433	217	2100	
1010 L 750A-VE	1010	811	198		476	238	2110	
1100 L 750A-VE	1100	885	216		520	260	2120	
1200 L 750A-VE	1200	958	235		563	281	2130	

ASHRAE 90.1 compliant.
 For standard and optional equipment, see form #PV 8130.
 Dimensions in inches, unless otherwise noted.
 Contact PVI representative for higher inputs.
 ** 3-phase only.

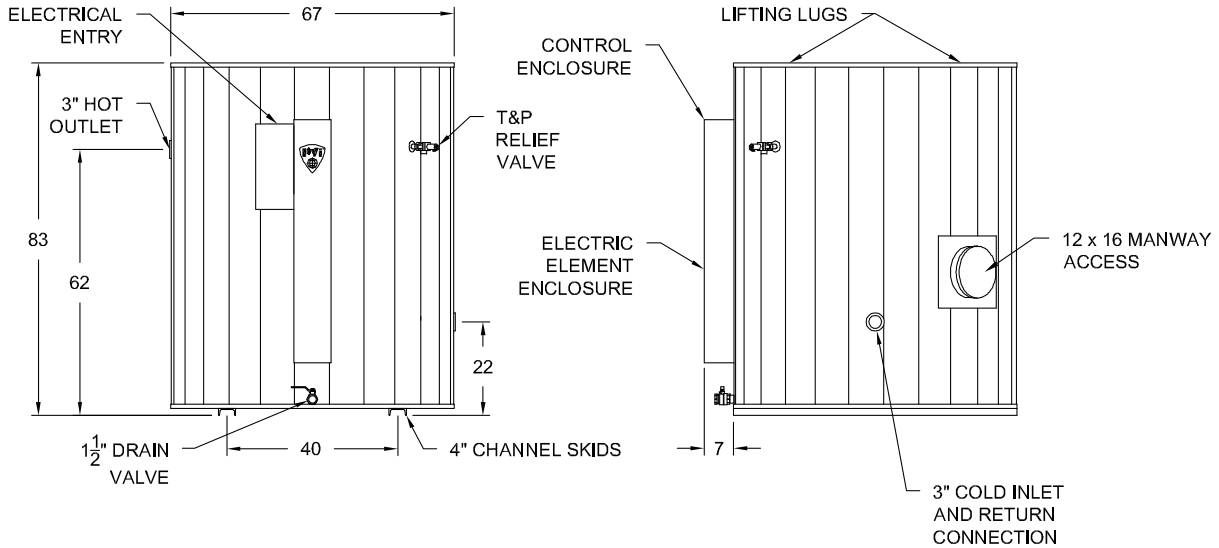

STANDARD ELECTRICAL REQUIREMENTS:

CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.
ALTERNATE VOLTAGES: FOR 230/460V, MULTIPLY KW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.
 FOR 220/440V, MULTIPLY KW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.

