
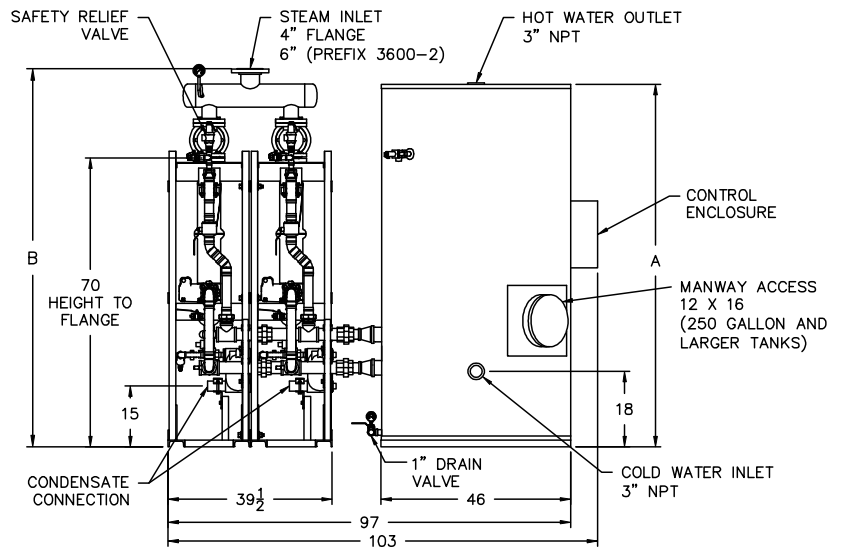


**AquaPLEX® Storage Tank (unlined duplex alloy)
with COBREX® Steam Heat Exchanger - Double-wall
DUAL EXCHANGER HIGH OUTPUT
250, 300 & 400 Gallon Tank Series - Dimensions**

Model No.	A	B	Amps @ 120V	Shipping Weight Lbs.
1200-2 L 250A-TCX	63	91	7	1695
1800-2 L 250A-TCX	63	91	7	1705
2700-2 L 250A-TCX	63	91	12	1715
3600-2 L 250A-TCX	63	94	8	1755
1200-2 L 300A-TCX	75	91	7	1750
1800-2 L 300A-TCX	75	91	7	1760
2700-2 L 300A-TCX	75	91	12	1780
3600-2 L 300A-TCX	75	94	8	1820
1200-2 L 400A-TCX	87	91	7	1810
1800-2 L 400A-TCX	87	91	7	1820
2700-2 L 400A-TCX	87	91	12	1840
3600-2 L 400A-TCX	87	94	8	1880

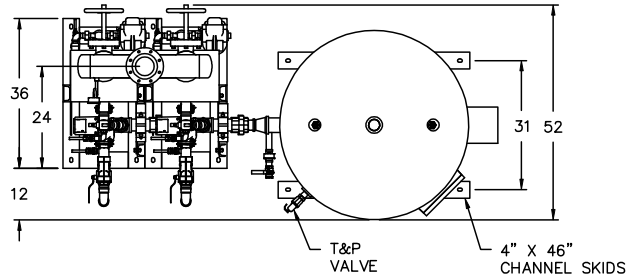

Refer to PV 8570 for standard and optional equipment.

Refer to PV 8587, PV 8588 and PV 8589 for detailed information on heat exchanger performance with different steam pressures and domestic water temperatures.

Steam pressures above 15 psi (125 psi max) require optional steam pressure reducing valve.

Recommended service clearance is 18 inches on all sides.

Completed piping assembly is factory fit between the exchanger and tank and is separated at unions for shipping. Tank and heat exchanger ship separately for field connection to piping assembly.

PVI reserves the right to change the design and specification without notice.