# **Conquest® Semi-Instantaneous Gas Condensing Water Heater**


Model ▼	Input Btuh	Recovery GPH ( 70°F to 140°F ①	(thermal efficiency) 40°F to 140°F ②	Gas Connection NPT	Vent Diameter (ETL listed for longer vents with larger diameter)	Operating Weight (lbs.)	Volume (gal)
20 L 100A-GCL	199,900	326 (95%)	233 (97%)	3/4	3" @ 100 equivalent ft	1470	98.2
25 L 100A-GCL	250,000	408 (95%)	291 (97%)				94.7
30 L 100A-GCL	300,000	490 (95%)	349 (97%)				

 $\odot~$  Recoveries and thermal efficiency derived from DOE 10 CFR 431 testing requirements (ANSI Z21.10.3 @ 70°F to 140°F).

② Recoveries and thermal efficiency based upon 40°F entering water temperature. Dimensions are in inches unless otherwise indicated.

For standard and opDonal equipment, refer to form PV 8550.

Empty weight is 635 pounds and shipping weight is 750 pounds (all models)

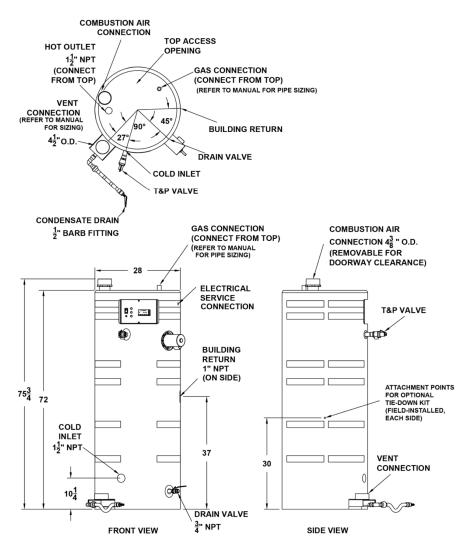

**Electrical Service** 

120VAC, 1Ø, 60 Hz. 5 amps

#### Exhaust Venting

Use a Category IV PVC, CPVC or ETL, UL, ULC or CSA listed stainless steel or Centrotherm InnoFlue SW Polypropylene vent. Minimum vent length 5 eq. feet. Do not size vent based only upon connection diameter at the appliance. Refer to installation manual for sizing.

# Inlet Combustion Air Duct

Up to 100 eq. feet using 3-inch PVC or galvanized vent pipe. Longer lengths are ETL listed through larger diameter pipe. Refer to installation manual.

# Gas Pressure - Natural

Minimum inlet flow pressure 3.5" W.C. Maximum static pressure 14" W.C. For LP gas, refer to installation manual.

## Minimum Clearance from Combustibles

Zero clearance for sides and rear, 24" from front. 15" from top. Can be installed directly on a combustible floor.

#### Recommended Service Clearances

18" from all sides. Check local and national codes for additional requirements.

## Emissions

All models < 20 ppm NOx.

\*\*Do not size vent and gas line based only upon connection diameter at the appliance. Refer to installation manual for sizing requirements.

PVI reserves the right to change the design and specification without notice.



Hot Water Solutions

A WATTS Brand

PV 8849 1-2025

PVI Industries • Fort Worth, TX © 2025 PVI