


**AquaPLEX® Storage Tank (unlined duplex alloy)
with EZ PLATE® Dual Boiler Water Heat Exchanger - Double-wall
900 Gallon Tank Series - Dimensions**

Model No.	Amps @120V ①	A	B	Shipping Weight Lbs.
600-2 L 900A-TRBPDW	5	87	42	2375
900-2 L 900A-TRBPDW	5	87	42	2435
1200-2 L 900A-TRBPDW	5	87	42	2465
1800-2 L 900A-TRBPDW	7	87	42	2580
2400-2 L 900A-TRBPDW	7	87	42	2670
3000-2 L 900A-TRBPDW	7	87	42	2655
3600-2 L 900A-TRBPDW	11	84	42	2820
4500-2 L 900A-TRBPDW	11	84	42	2865
5400-2 L 900A-TRBPDW	13	88	51	3015

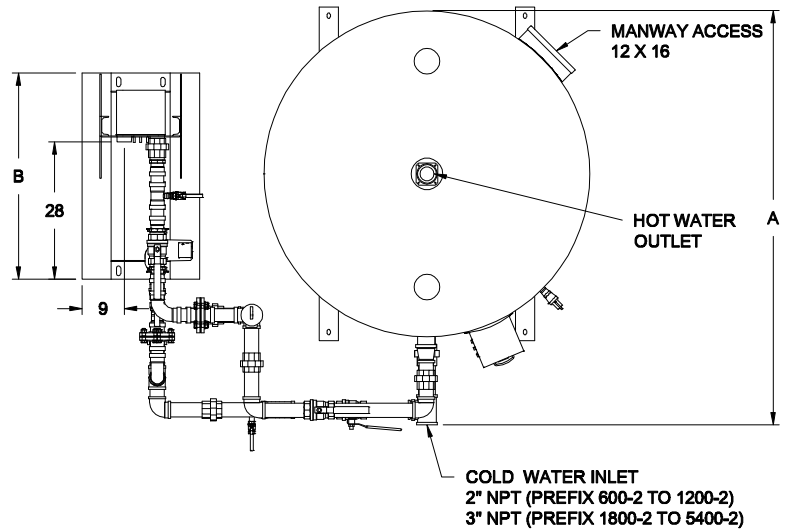


Refer to PV 8601, PV 8602 and PV 8603 for information on heat exchanger recoveries, pressure drop and boiler water flow requirements with various entering boiler water temperatures and domestic water temperatures.

Refer to PV 8600 for standard and optional equipment.

① Optional boiler water valve adds 2 amps total

Recommended service clearance is 18 inches on all sides.

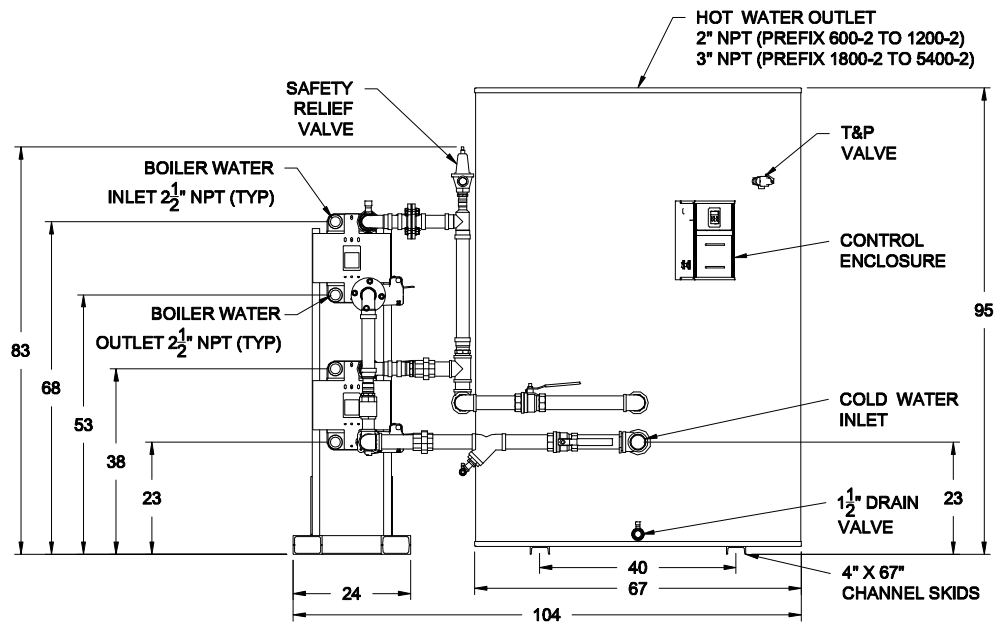

Completed piping assembly is factory fit between the exchanger and tank and separated at unions (or flanges) for shipping. Tank and heat exchanger ship separately for field assembly to piping assembly.

PVI reserves the right to change the design and specification without notice.

PV 8768 09-2019



PVI Industries, LLC
Fort Worth, TX • (800) 784-8326 • www.pvi.com

