


AquaPLEX® Storage Tank (unlined duplex alloy) with EZ PLATE® Dual Boiler Water Heat Exchanger - Double-wall 600 Gallon Tank Series - Dimensions

Model No.	Amps @120V ①	A	B	Shipping Weight Lbs.
600-2 L 600A-TRBPDW	5	77	42	1990
900-2 L 600A-TRBPDW	5	77	42	2050
1200-2 L 600A-TRBPDW	5	77	42	2080
1800-2 L 600A-TRBPDW	7	77	42	2195
2400-2 L 600A-TRBPDW	7	77	42	2285
3000-2 L 600A-TRBPDW	7	77	42	2270
3600-2 L 600A-TRBPDW	11	74	42	2435
4500-2 L 600A-TRBPDW	11	74	42	2480
5400-2 L 600A-TRBPDW	13	78	51	2630

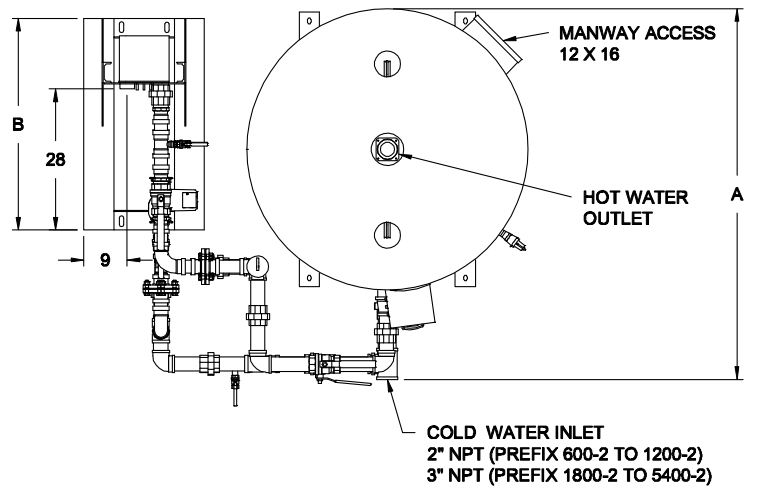


Refer to PV 8601, PV 8602 and PV 8603 for information on heat exchanger recoveries, pressure drop and boiler water flow requirements with various entering boiler water temperatures and domestic water temperatures.

Refer to PV 8600 for standard and optional equipment.

① Optional boiler water valve adds 2 amps total

Recommended service clearance is 18 inches on all sides.

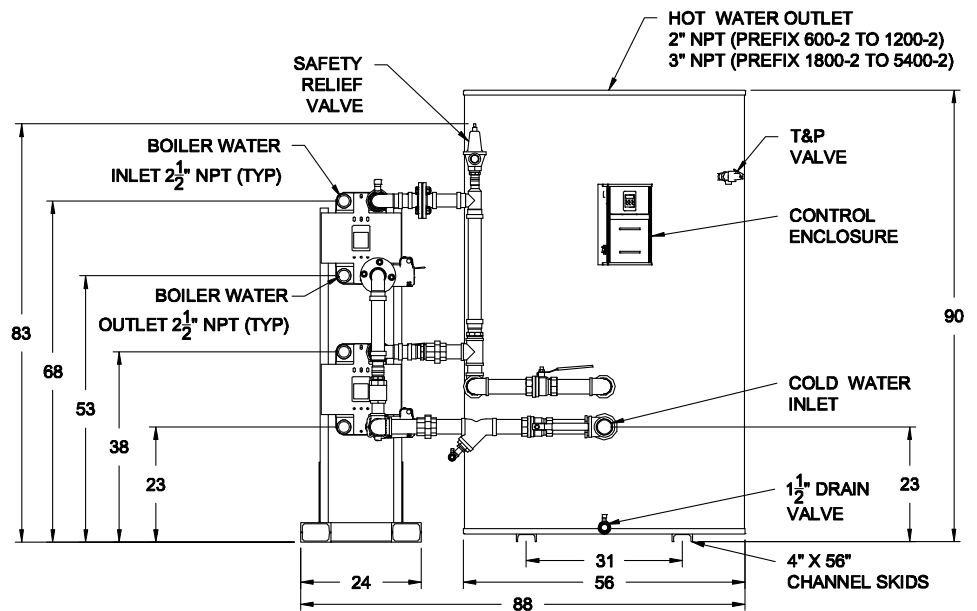

Completed piping assembly is factory fit between the exchanger and tank and separated at unions (or flanges) for shipping. Tank and heat exchanger ship separately for field assembly to piping assembly.

PVI reserves the right to change the design and specification without notice.

PV 8766 09-2019



PVI Industries, LLC
Fort Worth, TX • (800) 784-8326 • www.pvi.com

