


**AquaPLEX® Storage Tank (unlined duplex alloy)  
with EZ PLATE® Boiler Water Heat Exchanger - Double-wall  
900 Gallon Tank Series - Dimensions**

Model No.	Amps @120V ①	A	B	C	D	Shipping Weight Lbs.
600 L 900A-TRBPDW	4	86	91	91	42	2230
900 L 900A-TRBPDW	4	86	91	91	42	2260
1200 L 900A-TRBPDW	4	86	91	91	42	2270
1800 L 900A-TRBPDW	5	87	91	91	42	2300
2400 L 900A-TRBPDW	5	87	91	91	42	2360
3000 L 900A-TRBPDW	5	87	91	91	42	2370
3600 L 900A-TRBPDW	8	94	91	91	42	2385
4500 L 900A-TRBPDW	8	96	91	91	51	2430
5400 L 900A-TRBPDW	9	96	91	91	51	2500
7200 L 900A-TRBPDW	14	97	91	92	51	2660

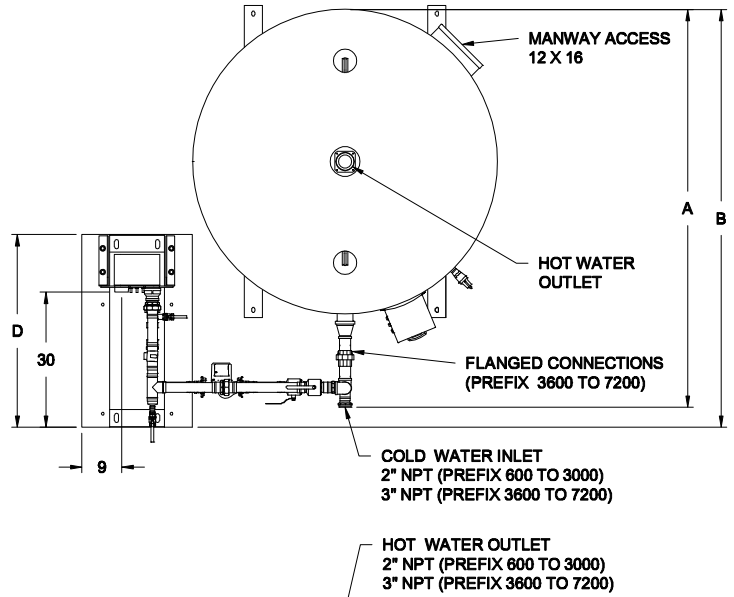


Refer to PV 8601, PV 8602 and PV 8603 for information on heat exchanger recoveries, pressure drop and boiler water flow requirements with various entering boiler water temperatures and domestic water temperatures.

Refer to PV 8600 for standard and optional equipment.

① Optional boiler water valve adds 2 amps

Recommended service clearance is 18 inches on all sides.

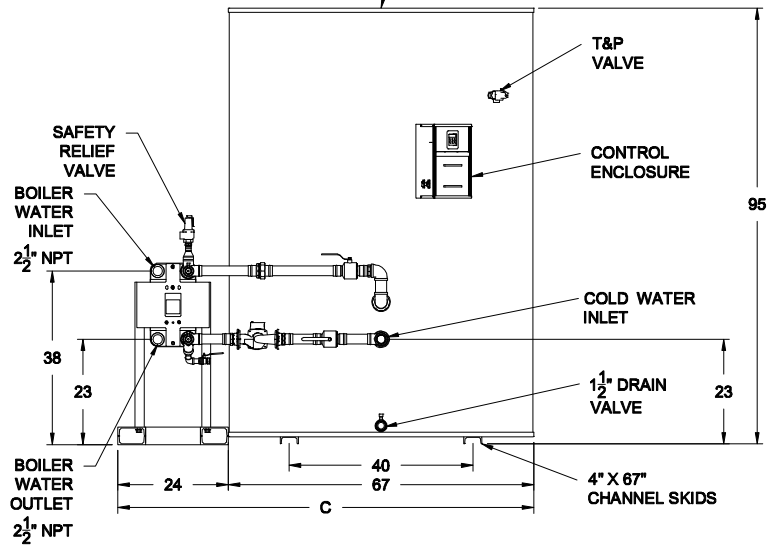

Completed piping assembly is factory fit between the exchanger and tank and separated at unions (or flanges) for shipping. Tank and heat exchanger ship separately for field assembly to piping assembly.

PVI reserves the right to change the design and specification without notice.

PV 8613 09-2019



PVI Industries, LLC  
Fort Worth, TX • (800) 784-8326 • www.pvi.com

