


# WATER HEATER PIPING GUIDELINE

## Single Water Heater - Dual Hot Outlet Temperatures

FOR: DURAWATT Electric  
 Maxim (gas, low NOx, oil or gas/oil)  
 QuickDraw (storage or instantaneous, steam or boiler water)  
 TURBOPOWER (83% efficient gas, low NOx, oil or gas/oil)

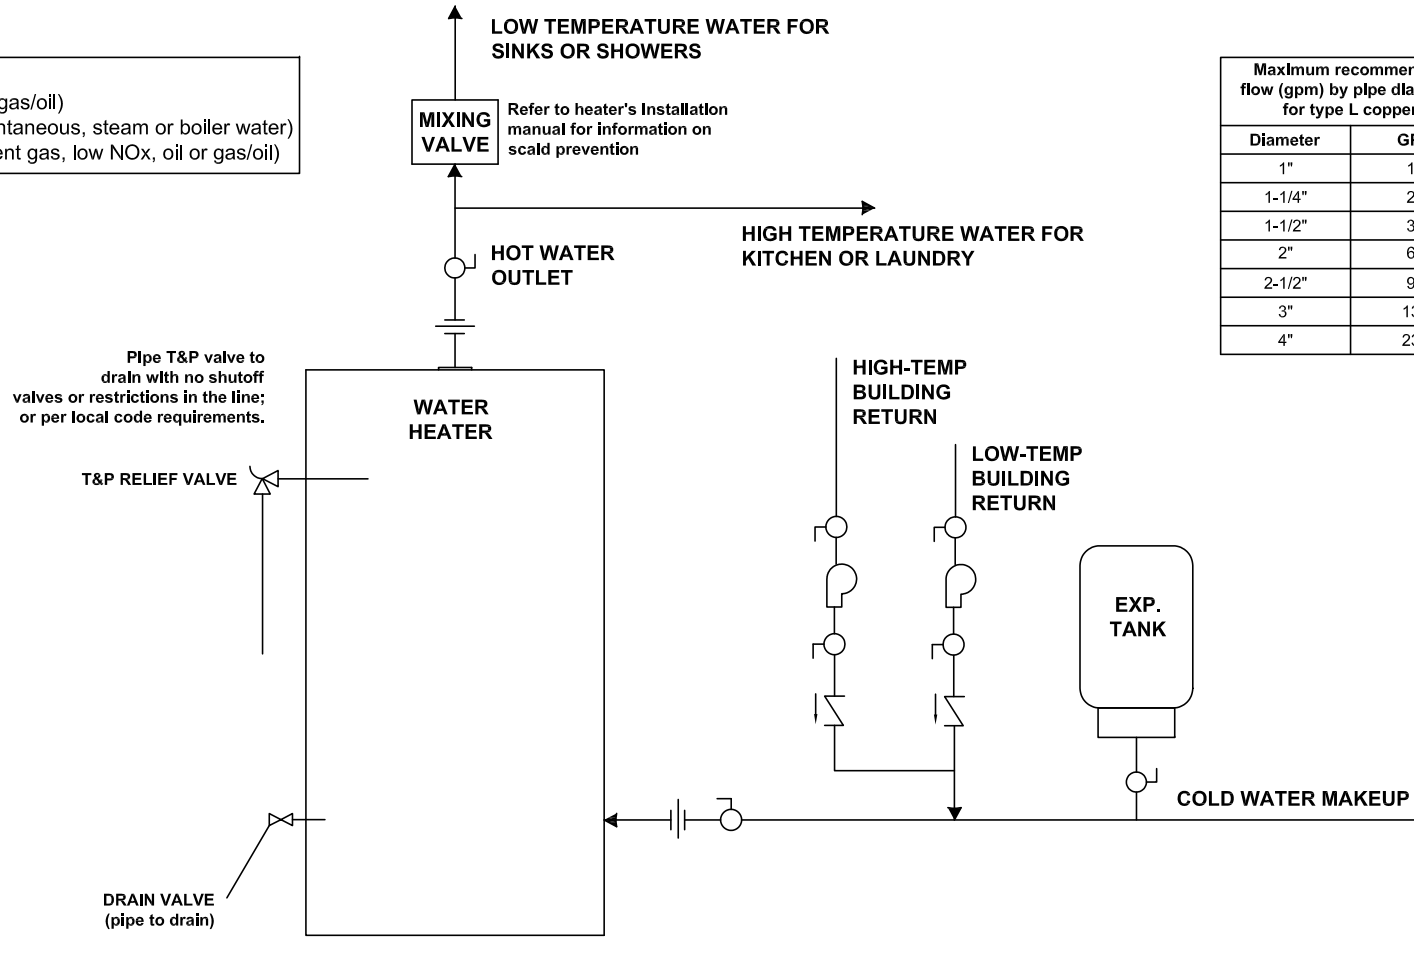

Maximum recommended flow (gpm) by pipe diameter for type L copper	
Diameter	GPM
1"	15
1-1/4"	22
1-1/2"	34
2"	60
2-1/2"	90
3"	130
4"	230

### LEGEND

	Pipe Union
	Ball Valve, Full Port
	T&P Relief Valve
	Check Valve
	Pump
	Shutoff Valve



PVI Industries, LLC  
 Engineered Water Heating Solutions®  
 www.pvi.com  
 Fort Worth, TX • 800-784-8326