
TURBOPOWER® GAS/OIL • PACKAGED WATER HEATER

AquaPLEX® STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 1500 GALLONS

Model Number	Recovery gph ①		Input	Min. Inlet Flow Gas	#2 Oil	Max. oil gph (gear	Dimensions (inches)				Blower Motor		Shipping Weight
	40°- 120°F	40°- 140°F	Btu/h	Pressure "W.C. 3	gph	capacity) ④	Α	В	С	JØ	HP	Volt/Ph/ Amps	lbs
750 L 1500A-TPGO	750	650	650,000	4.5	4.3	20	46	6	1	31	1/2	115/1Ø/10	3795
1000 L 1500A-TPGO	1000	800	800,000	6.0	5.7	20	46	8	1	31	1/2	115/1Ø/10	3835
1250 L 1500A-TPGO	1250	1000	1,000,000	7.5	7.2	20	46	8	1	31	3/4	115/1Ø/10	3925
1500 L 1500A-TPGO	1500	1200	1,200,000	7.5	8.6	20	46	8	1-1/4	31	1	115/1Ø/10	4005

- Recoveries based on 83% thermal efficiency. ASHRAE 90.1 compliant for efficiency and standby loss.
- ② "J" dimension is for the burner housing only. Gas train may exceed this dimension.
- 3 Standard gas train
- Standard gear capacities may change depending on burner supplier.
 - Designer must use gear capacities from the above chart to size the oil distribution piping system; including transfer pumps (if used).
- * The information presented is for Natural gas 0.6 S.G.—For operation with Propane (LP gas), consult factory. Dimensions are in inches unless otherwise specified.
 - For standard and optional equipment, see form PV 8183.

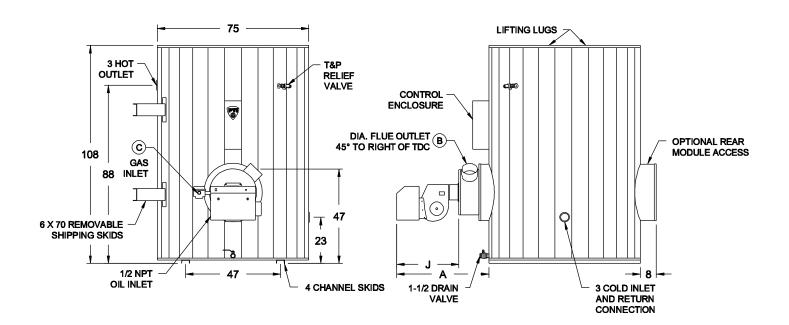

* GAS PRESSURE REQUIREMENTS

SEE TABLE FOR MINIMUM PRESSURE BY MODEL NUMBER.

MAXIMUM STATIC INLET PRESSURE: 14" W.C.

FOR PRESSURES OTHER THAN LISTED, CONSULT FACTORY.

Pressure shown is for standard UL gas train. Additional controls may increase pressure requirements.

VENTING REQUIREMENTS

-.02" TO -.06" W.C. (NEGATIVE PRESSURE)

ENTIRE VENT SYSTEM SHOULD NEVER BE SIZED BASED UPON THE VENT CONNECTION DIAMETER EXCLUSIVELY.
FOR PROPER SIZING, CONSULT
THE NATIONAL FUEL GAS CODE UNDER "FAN-ASSISTED."

STANDARD ELECTRICAL REQUIREMENTS

CONTROL VOLTAGE: 120V, 1Ø, 60 HZ., 2 AMPS. MOTOR VOLTAGE:

 $208\mathrm{V}, 230\mathrm{V}, \mathrm{AND}$ $460\mathrm{V}$ MOTORS ARE AVAILABLE BUT WILL REQUIRE A SEPARATE 120V/2 amps CONTROL CIRCUIT OR AN OPTIONAL CONTROL CIRCUIT TRANSFORMER.

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.

