



Durawatt® Electric, Packaged Water Heater

Tank Series 150 Gal • AquaPLEX® Duplex Stainless Steel

Model Number	Recovery Rate GPH		Input kW	Element AMPS**			Shipping Weight lbs
	40°-120°F	40°-140°F		240V, 1Ø	240V, 3Ø	480V, 3Ø	
45 L 150A-VE	45	37	9*	–	22	11	1050
90 L 150A-VE	90	70	18	75	44	22	1050
140 L 150A-VE	140	111	27	113	65	33	1050
180 L 150A-VE	180	150	36	150	87	44	1050
230 L 150A-VE	230	184	45	188	109	55	1060
270 L 150A-VE	270	220	54	225	130	65	1060
320 L 150A-VE	320	256	63	263	152	76	1060
370 L 150A-VE	370	300	72	300	174	87	1060
410 L 150A-VE	410	330	81	338	195	98	1070
460 L 150A-VE	460	370	90	375	217	109	1070
510 L 150A-VE	510	400	99	413	239	120	1090
550 L 150A-VE	550	440	108	450	260	130	1090
650 L 150A-VE	650	515	126	Consult factory	304	152	1100
740 L 150A-VE	740	590	144		347	174	1120
830 L 150A-VE	830	664	162		390	195	1130

ASHRAE 90.1 compliant. For standard and optional equipment, see form #PV 8130. Dimensions in inches, unless otherwise noted. Contact PVI representative for higher inputs.

*3-phase only. **For 208V 3Ø models, see PV 9031. Add 2 amps for the control circuit.

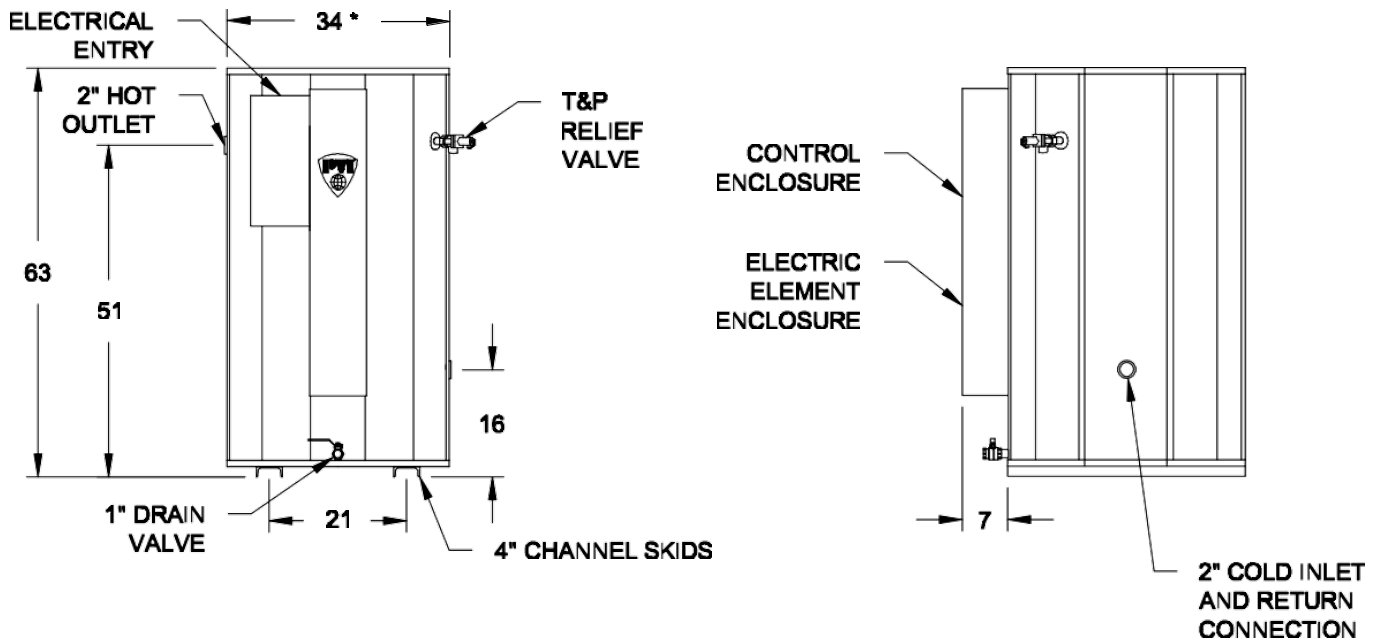

Standard Electrical Requirements

Control circuit transformer supplied on 480V only. A separate 120V circuit is required for controls on 208V and 240V or add a field wired control circuit and AC neutral conductor for grounding.

Alternate Voltages:

For 230/460V, multiply kW and recovery by .92. multiply AMPS by .96.
For 220/440V, multiply kW and recovery by .84. multiply AMPS by .92.



PVI reserves the right to change the design and specification without notice.

Hot Water Solutions