


# Durawatt® Electric, Packaged Water Heater

Tank Series 600 Gal • AquaPLEX® Duplex Stainless Steel

Model Number	Recovery Rate GPH		Input kW	Element AMPS**			Shipping Weight lbs
	40°-120°F	40°-140°F		240V, 1Ø	240V, 3Ø	480V, 3Ø	
45 L 600A-VE	45	37	9*	–	22	11	1870
90 L 600A-VE	90	70	18	75	44	22	1870
140 L 600A-VE	140	111	27	113	65	33	1870
180 L 600A-VE	180	150	36	150	87	44	1870
230 L 600A-VE	230	184	45	188	109	55	1880
270 L 600A-VE	270	220	54	225	130	65	1880
320 L 600A-VE	320	256	63	263	152	76	1880
370 L 600A-VE	370	300	72	300	174	87	1880
410 L 600A-VE	410	330	81	338	195	98	1890
460 L 600A-VE	460	370	90	375	217	109	1890
510 L 600A-VE	510	400	99	413	239	120	1910
550 L 600A-VE	550	440	108	450	260	130	1910
650 L 600A-VE	650	515	126	Consult factory	304	152	1920
740 L 600A-VE	740	590	144		347	174	1940
830 L 600A-VE	830	664	162		390	195	1950
920 L 600A-VE	920	737	180		433	217	1960
1010 L 600A-VE	1010	811	198		476	238	1970
1100 L 600A-VE	1100	885	216		520	260	1980
1200 L 600A-VE	1200	958	235		563	281	1990

AASHRAE 90.1 compliant. For standard and optional equipment, see form #PV 8130. Dimensions in inches, unless otherwise noted. Contact PVI representative for higher inputs.

\*3-phase only. \*\*For 208V 3Ø models, see PV 9037. Add 2 amps for the control circuit.

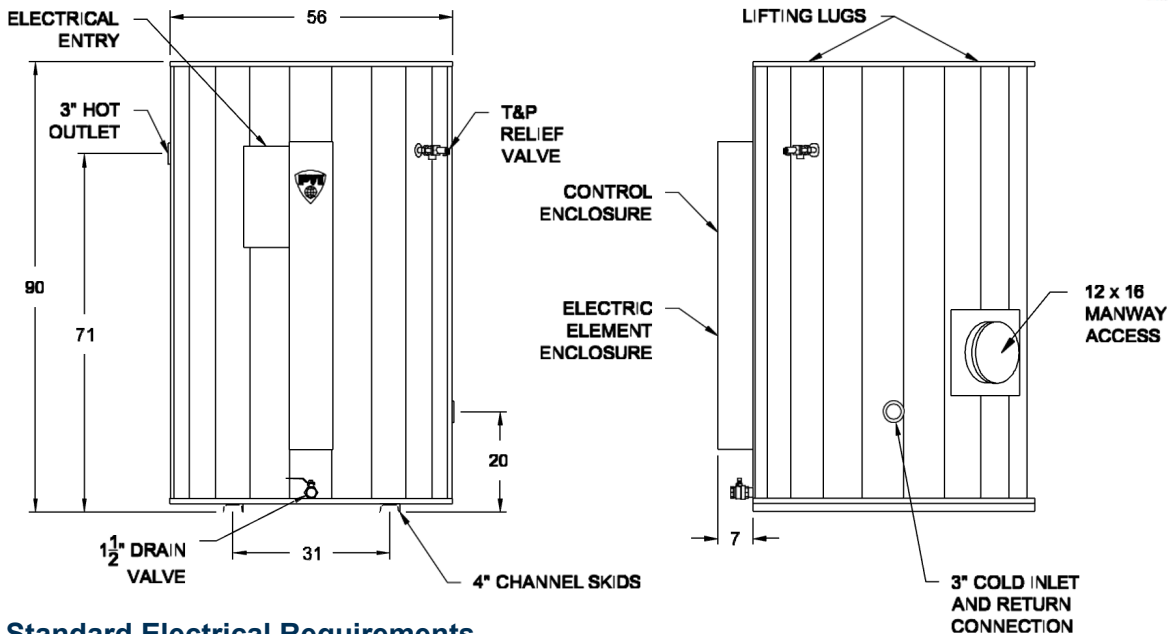

## Standard Electrical Requirements

Control circuit transformer supplied and AC neutral conductor for grounding.

## Alternate Voltages:

For 230/460V, multiply kW and recovery by .92. multiply AMPS by .96.  
For 220/440V, multiply kW and recovery by .84. multiply AMPS by .92.



PVI reserves the right to change the design and specification without notice.

Hot Water Solutions