


# DURAWATT® ELECTRIC • PACKAGED WATER HEATER

## AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 600 GALLONS - 208V, 3Ø

MODEL NUMBER	RECOVERY RATE GPH		INPUT kW	ELEMENT AMPS ** 208V, 3Ø	SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F			
45 L 600A-VE	45	37	9	25	1870
90 L 600A-VE	90	70	18	50	1870
140 L 600A-VE	140	111	27	75	1870
180 L 600A-VE	180	150	36	100	1870
230 L 600A-VE	230	184	45	125	1880
270 L 600A-VE	270	220	54	150	1880
320 L 600A-VE	320	256	63	175	1880
370 L 600A-VE	370	300	72	200	1880
410 L 600A-VE	410	325	80	222	1890
460 L 600A-VE	460	368	90	251	1890
510 L 600A-VE	510	405	99	276	1910
540 L 600A-VE	540	430	105	292	1910
610 L 600A-VE	610	491	126	334	1920
690 L 600A-VE	690	552	135	376	1930
770 L 600A-VE	770	614	150	417	1940
840 L 600A-VE	840	675	165	459	1950
920 L 600A-VE	920	736	180	501	1960

ASHRAE 90.1 compliant.  
 For standard and optional equipment, see form #PV 8130.  
 Dimensions in inches, unless otherwise noted.  
 Contact PVI representative for higher inputs.  
 \*\* For other voltages, see PV 8456.

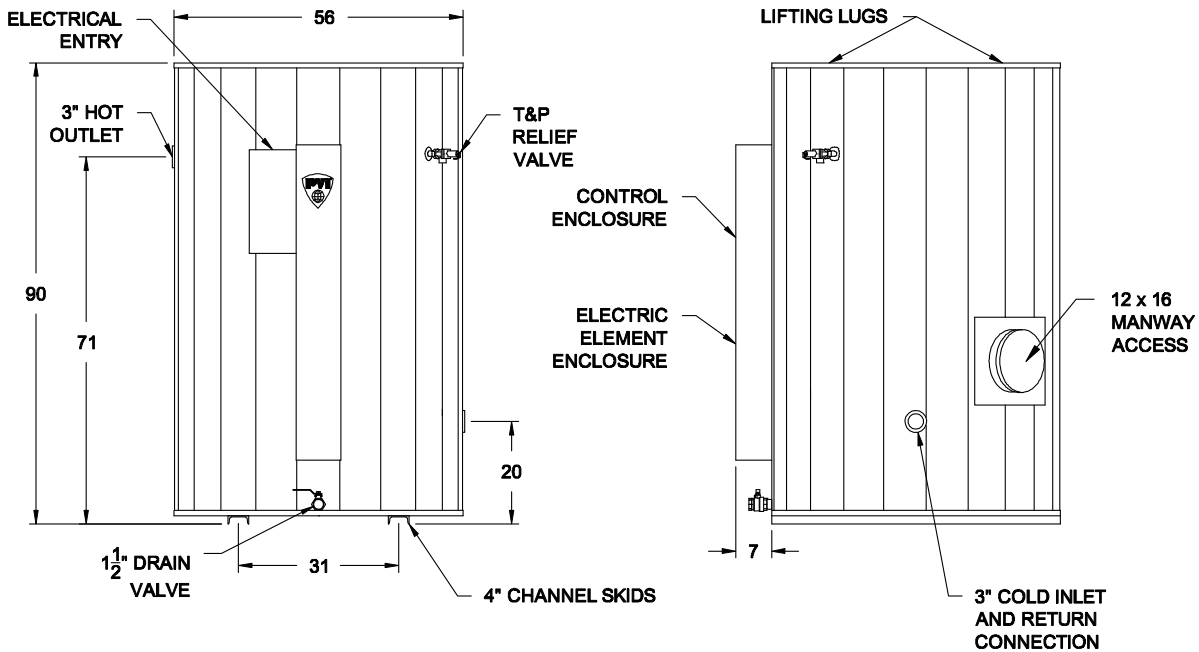

### STANDARD ELECTRICAL REQUIREMENTS:

CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.  
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.  
**ALTERNATE VOLTAGES:** FOR 230/460V, MULTIPLY kW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.  
 FOR 220/440V, MULTIPLY kW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.