


DURAWATT® ELECTRIC • PACKAGED WATER HEATER

AquaPLEX® - STORAGE TANK (UNLINED DUPLEX ALLOY)

TANK SERIES 600 GALLONS - 208V, 3Ø

MODEL NUMBER	RECOVERY RATE GPH		INPUT kW	ELEMENT AMPS **	SHIPPING WEIGHT lbs
	40°-120°F	40°-140°F		208V, 3Ø	
45 L 600A-VE	45	37	9	25	1870
90 L 600A-VE	90	70	18	50	1870
140 L 600A-VE	140	111	27	75	1870
180 L 600A-VE	180	150	36	100	1870
230 L 600A-VE	230	184	45	125	1880
270 L 600A-VE	270	220	54	150	1880
320 L 600A-VE	320	256	63	175	1880
370 L 600A-VE	370	300	72	200	1880
410 L 600A-VE	410	325	80	222	1890
460 L 600A-VE	460	368	90	251	1890
510 L 600A-VE	510	405	99	276	1910
540 L 600A-VE	540	430	105	292	1910
610 L 600A-VE	610	491	120	334	1920
690 L 600A-VE	690	552	135	376	1930
770 L 600A-VE	770	614	150	417	1940
840 L 600A-VE	840	675	165	459	1950
920 L 600A-VE	920	736	180	501	1960

ASHRAE 90.1 compliant.
 For standard and optional equipment, see form #PV 8130.
 Dimensions in inches, unless otherwise noted.
 Contact PVI representative for higher inputs.
 ** For other voltages, see PV 8456.

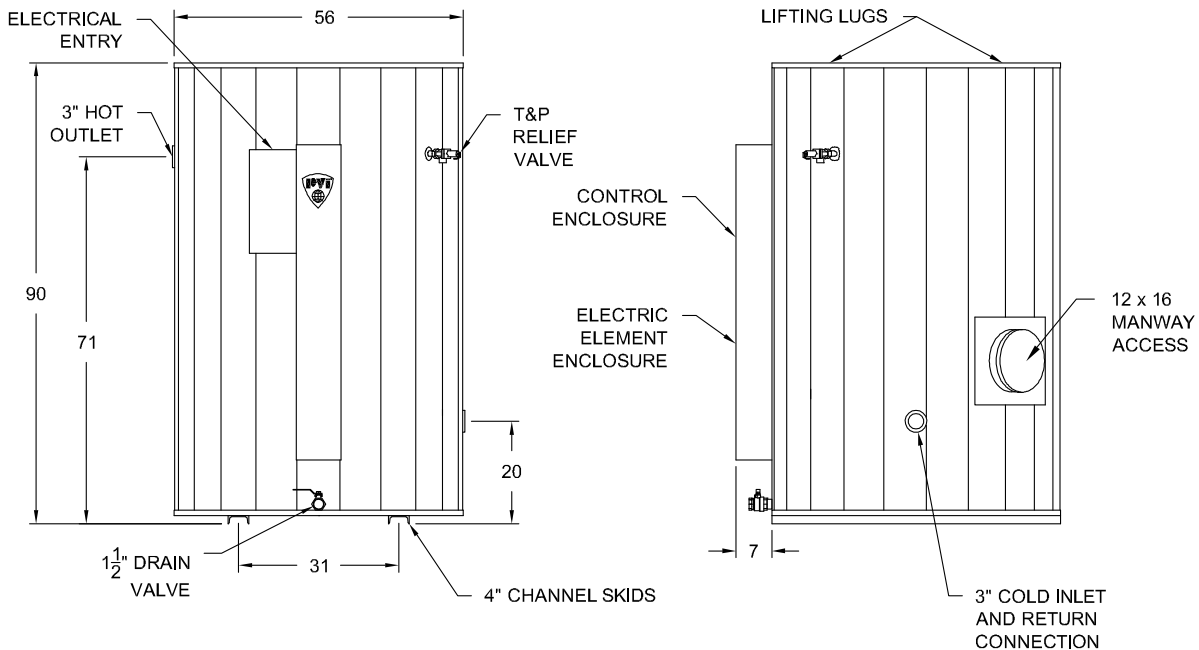

STANDARD ELECTRICAL REQUIREMENTS:

CONTROL CIRCUIT TRANSFORMER SUPPLIED ON 480V ONLY. TAPPED CONTROL CIRCUIT INTERNALLY WIRED FOR 208V AND 240V.
 208V AND 240V MODELS REQUIRE AC NEUTRAL CONDUCTOR FOR GROUNDING OF CONTROL CIRCUIT.
ALTERNATE VOLTAGES: FOR 230/460V, MULTIPLY kW AND RECOVERY BY .92. MULTIPLY AMPS BY .96.
 FOR 220/440V, MULTIPLY kW AND RECOVERY BY .84. MULTIPLY AMPS BY .92.