


Durawatt® Electric, Packaged Water Heater

Tank Series 600 Gal, 208V, 3Ø • AquaPLEX® Duplex Stainless Steel

Model Number	Recovery Rate GPH		Input kW	Element AMPS**	Shipping Weight lbs
	40°-120°F	40°-140°F		208V, 3Ø	
45 L 600A-VE	45	37	9	25	1870
90 L 600A-VE	90	70	18	50	1870
140 L 600A-VE	140	111	27	75	1870
180 L 600A-VE	180	150	36	100	1870
230 L 600A-VE	230	184	45	125	1880
270 L 600A-VE	270	220	54	150	1880
320 L 600A-VE	320	256	63	175	1880
370 L 600A-VE	370	300	72	200	1880
410 L 600A-VE	410	325	80	222	1890
460 L 600A-VE	460	368	90	251	1890
510 L 600A-VE	510	405	99	276	1910
540 L 600A-VE	540	430	105	292	1910
610 L 600A-VE	610	491	120	334	1920
690 L 600A-VE	690	552	135	376	1930
770 L 600A-VE	770	614	150	417	1940
840 L 600A-VE	840	675	165	459	1950
920 L 600A-VE	920	736	180	501	1960



ASHRAE 90.1 compliant. For standard and optional equipment, see form #PV 8130. Dimensions in inches, unless otherwise noted. Contact PVI representative for higher inputs. **For other voltages, see PV 8456. Add 2 amps for the control circuit.

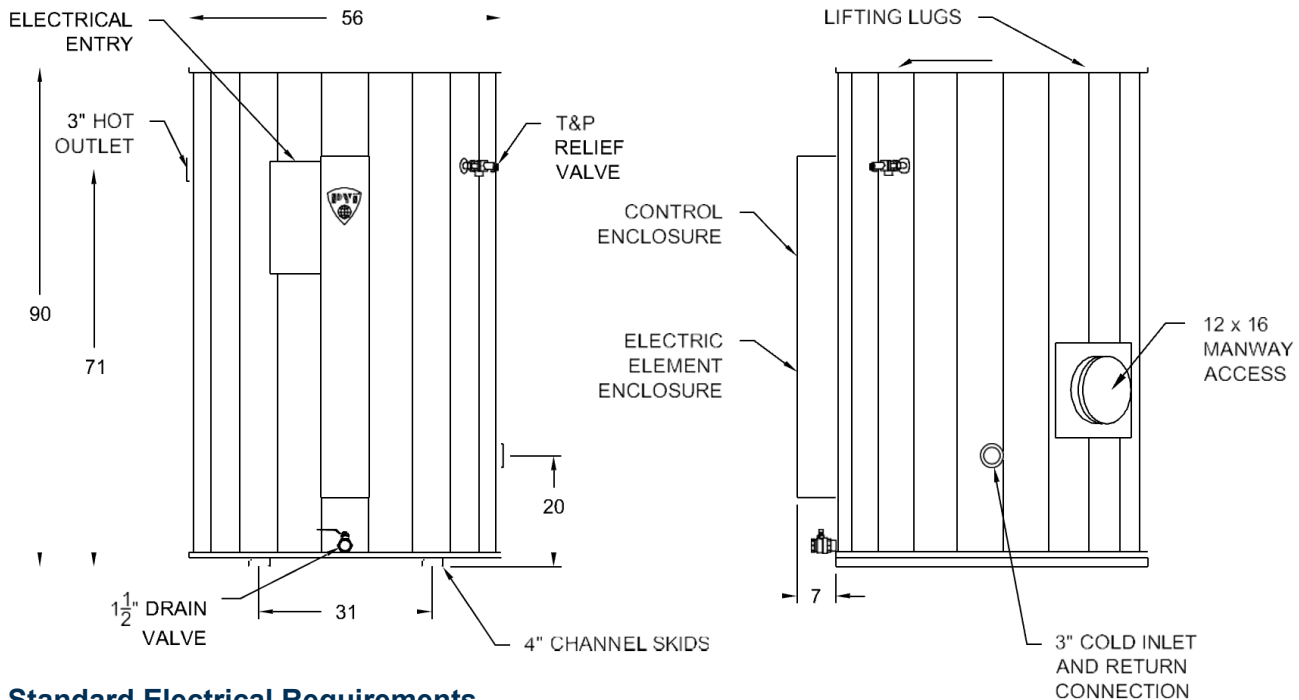

Standard Electrical Requirements

Control circuit transformer supplied on 480V only. A separate 120V circuit is required for controls on 208V and 240V or add a field wired control circuit and AC neutral conductor for grounding.

Alternate Voltages:

For 230/460V, multiply kW and recovery by .92. multiply AMPS by .96.
For 220/440V, multiply kW and recovery by .84. multiply AMPS by .92.



PVI reserves the right to change the design and specification without notice.

Hot Water Solutions

PVI Industries • Fort Worth, TX

© 2023 PVI